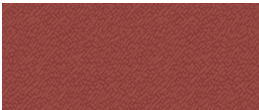

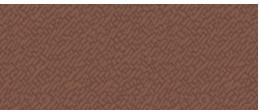
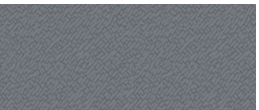
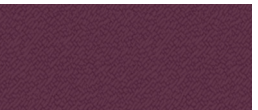
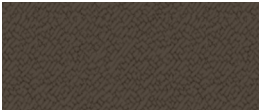



MS Colorfast45® and ColorFit40™ Paint System

				
Bright White (39) ☆	White (30) ☆	Ivory (28) ☆	Light Stone (63) ☆	Mocha Tan (22) ☆
				
Carlsbad Canyon (10) ☆	Taupe (74) ☆	Brown (12) ☆	Burnished Slate (49) ☆	Black (06) ☆
				
Ash Grey (25) ☆	Zinc Grey (29) ☆	Charcoal (17) ☆	Ocean Blue (35) ☆	Hawaiian Blue (70) ☆
				
Red (24) ☆	Patriot Red (73) ☆	Burgundy (15) ☆	Forest Green (26) ☆	Fern Green (07) Low Gloss ☆
				
Native Copper (190) ☆	Galvanized (00) ☆ Non-Painted Finish - No Warranty			

MS Crinkle Finish Paint System

				
Red (24) ☆	Forest Green (26) ☆	Brown (12) ☆	Charcoal (17) ☆	Burgundy (15) ☆
				
Burnished Slate (49) ☆	Black (06) ☆			

Due to the unique texture these colors will not perfectly match and are not interchangeable with other similar Metal Sales colors. This is a unique appearance coating that needs to be seen and felt. Actual samples are available by request.




☆ All Colors Meet or Exceed Steep Slope ENERGY STAR® Requirements
* Premium Color

metalsales.us.com

Color selections are close representations but are limited by processing and viewing conditions. Actual samples are available upon request. For all specific warranty, application, installation, and technical information regarding these products contact your local sales representative.

CLASSIC RIB® PANEL

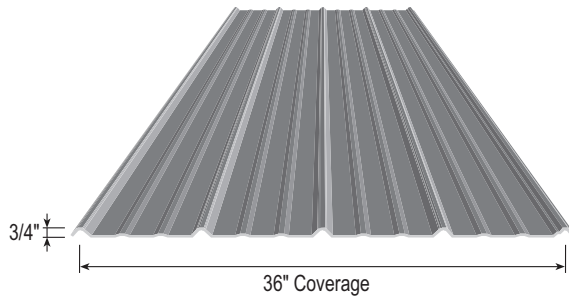

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid substrate.

Information:

Mechanically seamed side-lap. Concealed clip designed for thermal movement.

Testing & Approvals:

UL 263 Fire Resistance Rating

UL 580, Class 90 Wind Uplift

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

ASTM E 564-95 Diaphragm Test


Texas Department of Insurance Evaluation Report

ICC Evaluation Report

Miami-Dade County Approved

2014 FBC Approved

PRO-PANEL II® PANEL

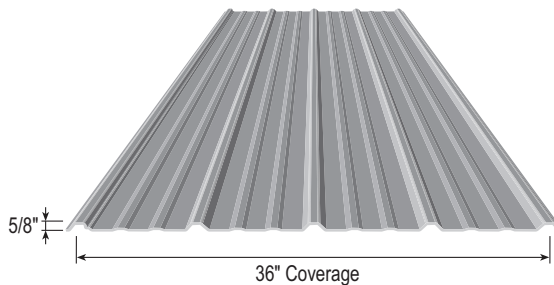

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid Substrate.

Information:

Exposed direct-fastened roof and wall panel.

Testing & Approvals:

UL 263 Fire Resistance Rating


UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

ASTM E 455 Diaphragm Test

2014 FBC Approved

1.25" CORRUGATED PANEL

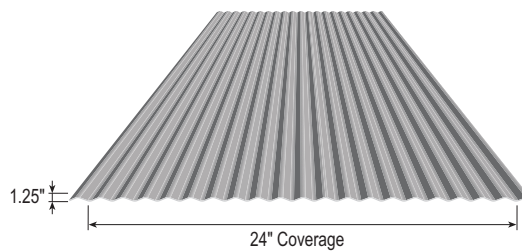

GENERAL INFORMATION

Minimum Slope: 3:12

Substructure:

Installs over Open Framing or Solid Substrate.

Information:

Exposed direct-fastened roof and wall panel.

Testing & Approvals:

UL 263 Fire Resistance Rating


UL 580, Class 90 Wind Uplift

UL 790, Class A Fire Resistance Rating

UL 2218, Class 4 Impact Resistance

DL-3 PANEL

FOR ARCHED AND CURVED ROOF APPLICATIONS

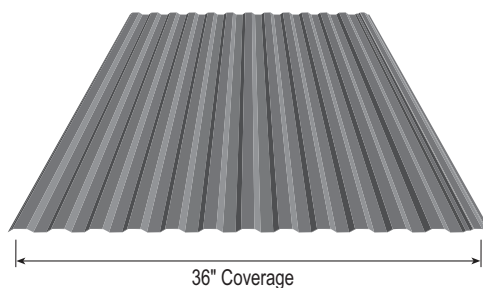

GENERAL INFORMATION

Minimum Radius: 26'-0"

Substructure:

Installs over Open Framing or Solid Substrate.

Panel Lengths:

3'-0" minimum up to 45'-0" maximum

Information:

Exposed direct-fastened radius roof panel.

Available in:

Bright White Taupe

White Red

Light Stone Burnished Slate

Ash Grey Ocean Blue

Brown Charcoal

Forest Green Galvanized